

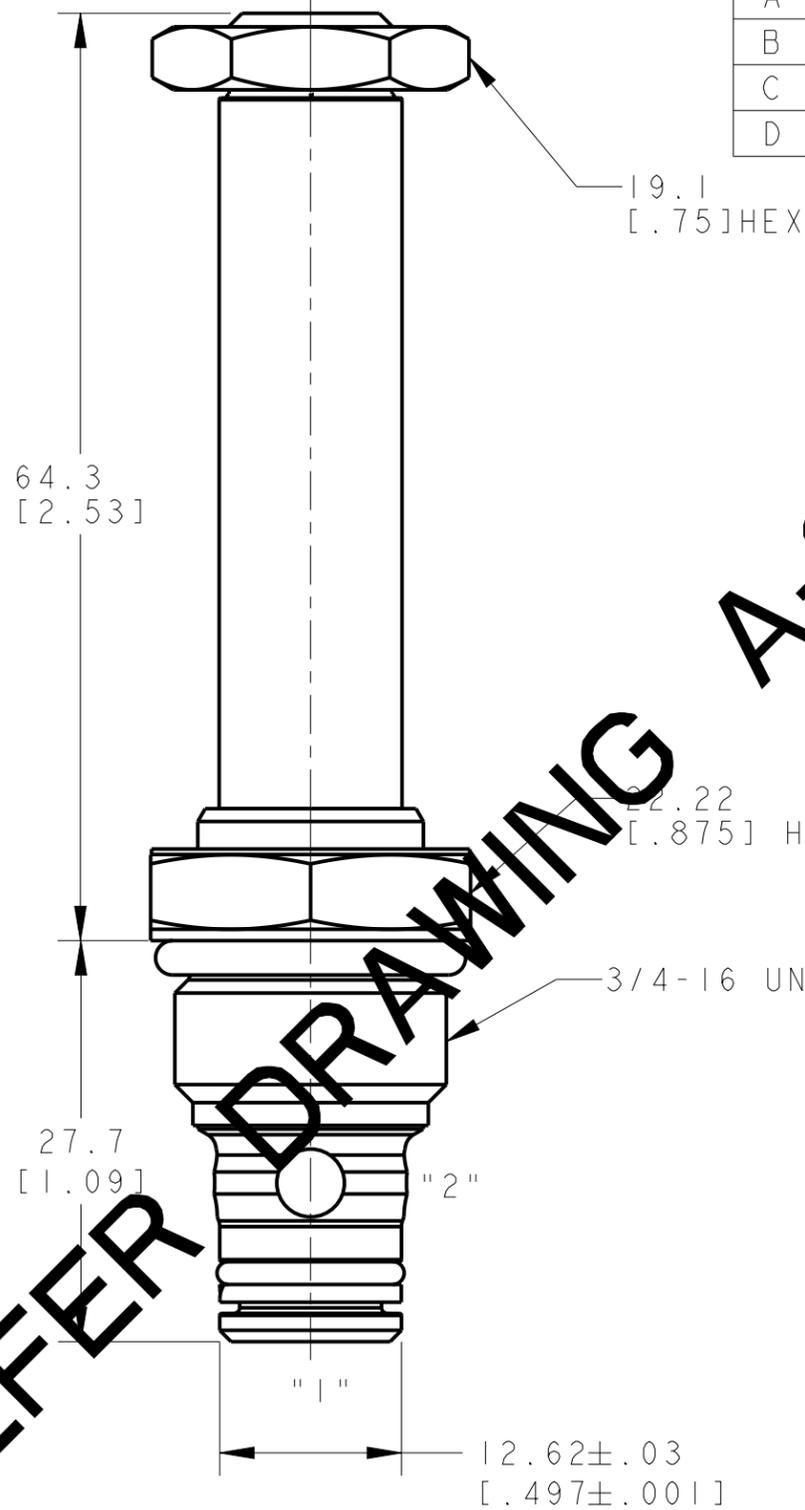


REV	DESCRIPTION	BY	CHK	DATE	ECN / MPS
A	ENGINEERING RELEASE	JGS	AH	2/12/05	M63978
B	ADDED SYMBOL	VR	IKK	8/25/11	M81045A
C	REMOVED SYMBOL OF SV5-8-C AND SV-3-8-C	YKP	VR	09/14/12	M86687
D	UPDATED HYDRAULIC SYMBOLS IN A-2416-096 DRAWING	MBK	YKP	09/24/15	0113337

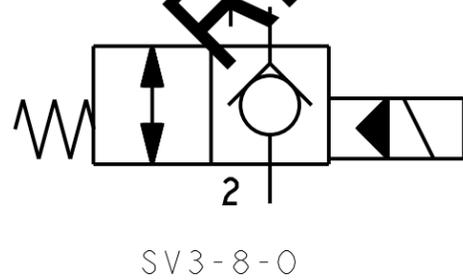

DRAWING A-2416-096

- NOTE:
- 1 USE VALVE CAVITY: C-8-2
  - 2 NET WEIGHT:  
CARTRIDGE ONLY: 10 kg [21 lb]  
CARTRIDGE W/COIL: 28 kg [62 lb]  
CARTRIDGE W/COIL AND ALUMINUM BODY: .46 kg [1.02 lb]
  - 3 TORQUE INTO CAVITY 34-41 N.m [25-30 lbf.ft]

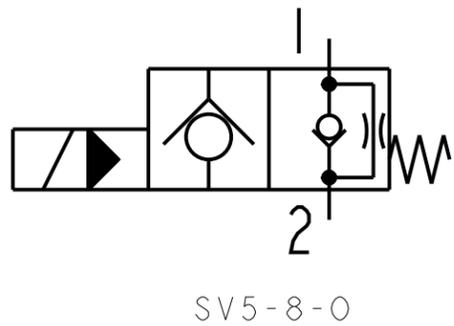

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES <input type="checkbox"/> MILLIMETERS (INCHES) <input checked="" type="checkbox"/>	DRAWING BASED ON ANSI Y14.5M-1982	
	THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)	
TOLERANCES .X ± .XX ± .XXX ± < ±	DRAWN JGS BY/DATE 7/11/03 CHECKED LMD BY/DATE 8/4/03	MATERIAL/HEAT TREAT  
UNSPECIFIED RADII ARE: ----	ENGRG BY/DATE METALLURGY BY/DATE	TITLE SOLENOID VALVE INSTALLATION
UNSPECIFIED DRAFT ANGLES ARE: ----°	<input checked="" type="checkbox"/> THIRD ANGLE PROJECTION <input type="checkbox"/> DO NOT SCALE	NUMBER A-2416-019
B SIZE	ARITHMETICAL AVERAGE <input checked="" type="checkbox"/>	SCALE 2/1 SHEET 1 OF 1

