


PART NUMBER	I.D. (REF) mm [in]	O.D. (REF) mm [in.]	OPERATING PRESSURE bar [psi]	MIN. BURST PRESSURE bar [psi]	MIN. BEND RADIUS mm [in]	WEIGHT kg/m [lbs/ft]
FC579-04	6.4 [.25]	14.1 [.56]	690 [10000]	1380 [20000]	50.8 [2.00]	0.33 [.22]
FC579-06	9.5 [.38]	19.2 [.76]	690 [10000]	1380 [20000]	127 [5.00]	0.57 [.38]

ⓐ
1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
G	REDRAWN, UPDATED TO DANFOSS FORMAT. 1) UPDATED O.D. VALUES FROM MAX TO REF FOR ALL SIZES. 2) REVISED NOTE #4 TO UPDATE LAYLINE IDENTIFICATION. 3) UPDATED TITLE AND SUBTITLE.	2022-10-31 AAG	CO-0226397
H	1) UPDATED NOTE #4 FOR LAYLINE IDENTIFICATION. 2) UPDATED INK-JET TRACEABILITY WAS "MADE IN USA"	2024-01-22 ARC	CO-0232760

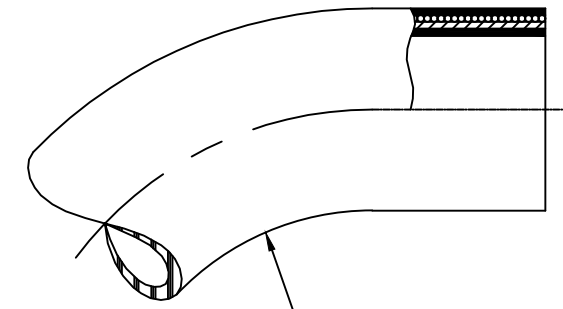

MIN. BEND RADIUS

5. TEMPERATURE RANGE: -40°C TO +49°C [-40°F TO +120°F].

4. EXAMPLE OF LAYLINE IDENTIFICATION FOR -04 SIZE: ⓐ₂ ⓓ₁



INK-TRANSFER: Aeroquip by Danfoss FC579-04 6.4 MM (0.25 IN) DN6 Dura-Tuff MSHA IC-84/19
(PRESSURE GAGE) 690 BAR (10000 PSI) (TEMPERATURE GAGE) -40°C to +49°C (-40°F to +120°F)
FITTING SERIES (FITTING LOGO) 2 MATCHMATE RINGS (WARNING LOGO) (WARNING LABEL).

INK-JET: "YYYY-MM-DD Made in USA /-/- LOT CODE" ⓓ₂

3. APPLICATION: FOR HIGH PRESSURE HYDRAULIC JACKING SYSTEM.

2. CONSTRUCTION: SYNTHETIC RUBBER INNER TUBE, TWO WIRE BRAID REINFORCEMENT AND SYNTHETIC RUBBER COVER.

1. ALL HOSE ATTRIBUTES ARE METRIC [ENGLISH].

FLUID CONVEYANCE DIVISION MAUMEE, OHIO U.S.A.		DRAWN A. GHADGE	
		CHECKED A. GHADGE	
		APPROVED P. DEWITT	
		RELEASE DATE 2022-10-31	
		DRAWING INTERPRETATION PER ES 10	
		DRAWING TITLE	
CO-0226397		AEROQUIP HOSE ⓐ ₃	
CAGE CODE	01276	2 WIRE BRAID REINFORCEMENT, RUBBER COVER	
THIRD ANGLE PROJECTION	DIST U	DRAWING NUMBER	
	SCALE A3	FC579	
	SCALE NONE	REV	
	SHEET 1	H	
<small>THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL OR DESIGN. (PER ISO 16016)</small>			