
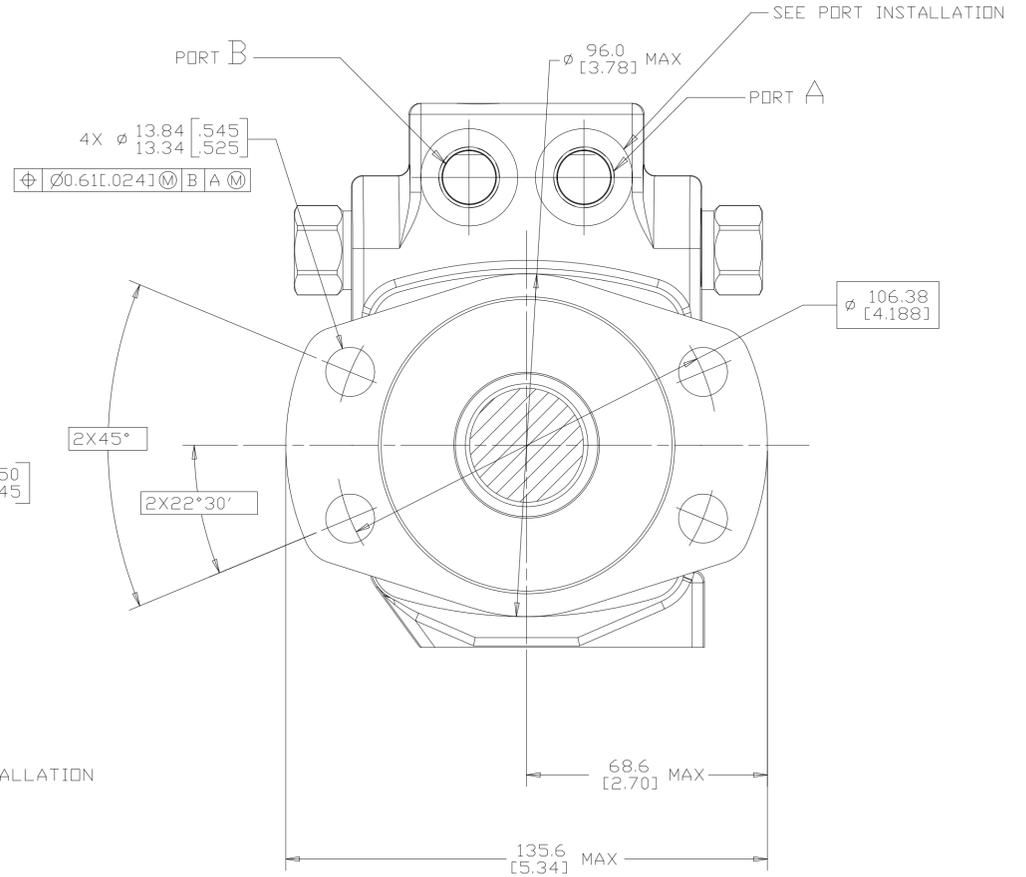
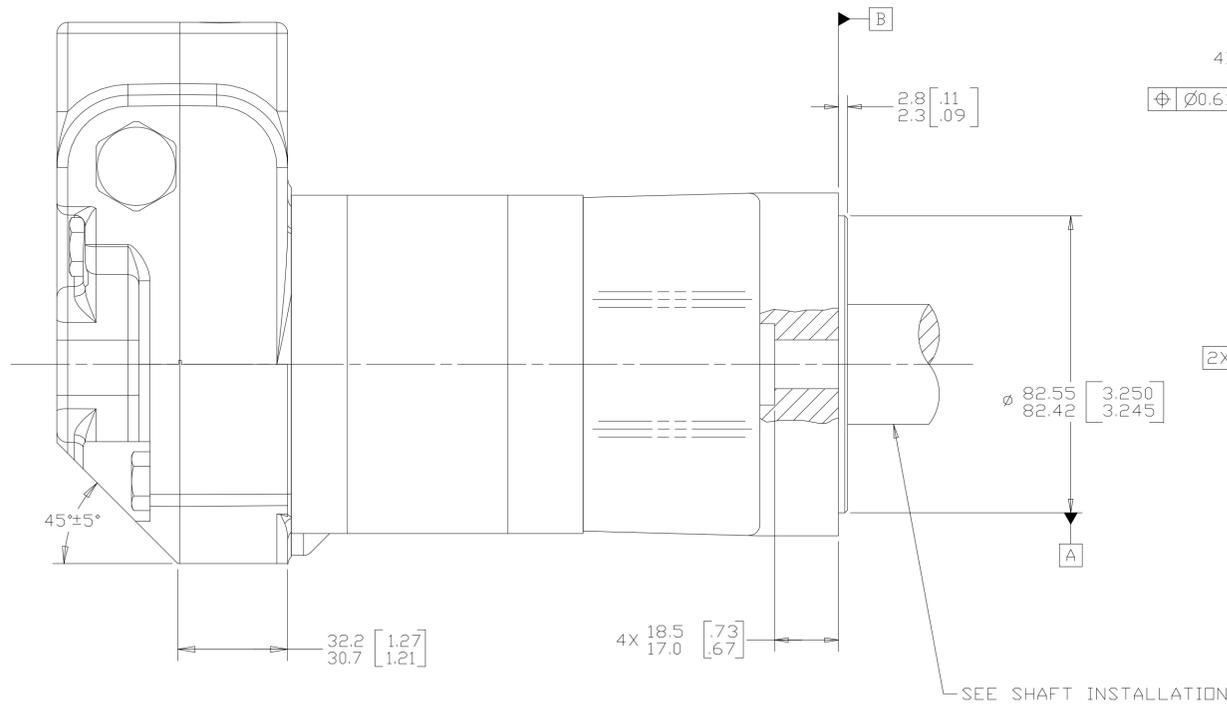


REV	DESCRIPTION	BY	CHK	DATE	ECN
A	ENGINEERING RELEASE	PM		07-18-05	M65088
B	-1X(7B)56.1[2.21] MAX WAS 66.3[2.61] MAX -2X(5B)32.2/30.7[1.27/1.21] WAS 22.4/20.8 [.88/.82]	AGJ		9-2-05	M65417
C	REVISED FOR STACK-UP	SMT		05-30-12	M85791

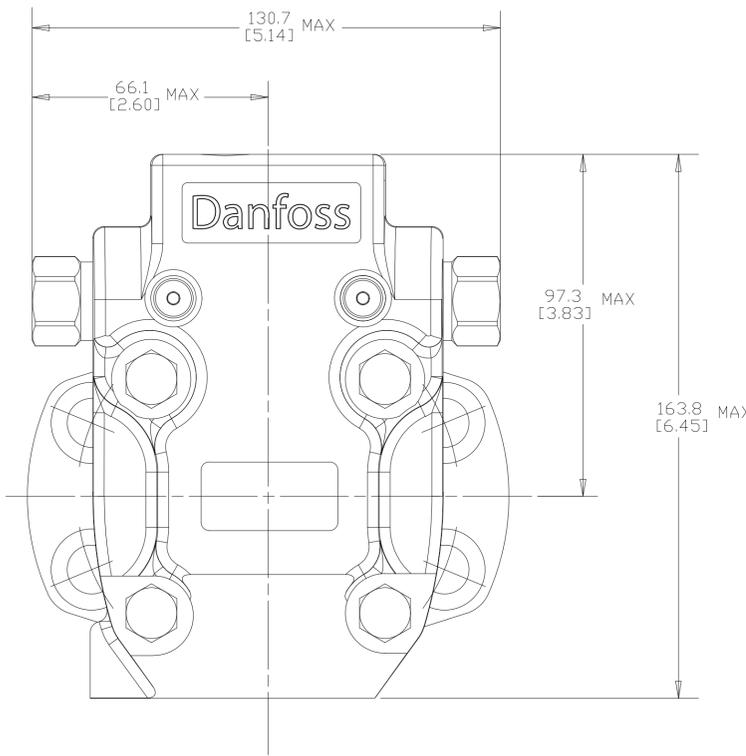

NOTE

1 ROTATION:
STANDARD: WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE;
CLOCKWISE WHEN PORT "A" IS PRESSURIZED
COUNTERCLOCKWISE WHEN PORT "B" IS PRESSURIZED

REVERSE: WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE;
CLOCKWISE WHEN PORT "B" IS PRESSURIZED
COUNTERCLOCKWISE WHEN PORT "A" IS PRESSURIZED

2 MOUNTING TYPE: AJ
STANDARD (MAGNETO), 4 BOLT: ϕ 82.6 [3.25] PILOT
 ϕ 13.59 [0.535] HOLES ON ϕ 106.4 [4.19] BOLT CIRCLE
2.79 [0.110] PILOT LENGTH

REVIEWED FOR CLASSIFICATION PER ESP-042

DRAWING BASED ON ANSI Y14.5M-1994

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN: INCHES MILLIMETERS

TOLERANCES: xx ± REF, xxx ± ONLY

UNSPECIFIED RADII ARE: THIRD ANGLE PROJECTION, DO NOT SCALE

UNSPECIFIED DRAFT ANGLES ARE: ARITHMETICAL AVERAGE, DO NOT SCALE

DRAWING FORMAT: CADD MANUAL

THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHER WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHT RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL OR DESIGN. (PER ISO 16016)

Danfoss

DRAWN BY/DATE: PM 07-28-05
CHECKED BY/DATE: MLL 07-29-05
ENGRG BY/DATE: JML 07-29-05
METALLURGY BY/DATE: -----

MATERIAL/HEAT TREAT: -----
TITLE: 4000 COMPACT SERIES MOTOR INSTALLATION
NUMBER: A-1329-055
SCALE: 1/1
SHEET: 1 OF 1